




3 Megapixel Mini Vandal Resistant IR Dome IP Camera w/Motorized Lens

Features

- 1/3" 3 Megapixel Progressive Scan CMOS
- H.264 & MJPEG Dual-Stream Encoding
- Max 20fps@3M [2048×1536] & 25/30fps@1080p [1920×1080]
- DWDR, Day/Night (ICR), 3DNR, AWB, AGC, BLC
- Remote Monitoring with iPhone, iPad or PC (Internet Browser, ARMS Pro/HD, X4, X5 Synergy VMS)
- 2.8~12mm Varifocal Lens
- 20m IR LED Distance
- Rugged IK10 & IP66 Housing, PoE

Dimensions

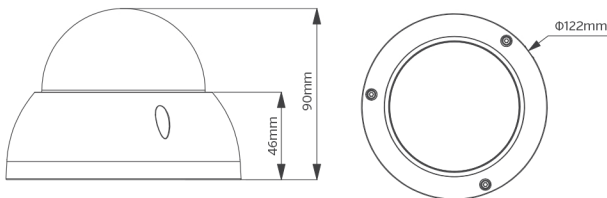

Camera		
Image Sensor	1/3" 3 Megapixel progressive scan CMOS	
Effective Pixels	2048 × 1536 (3,145,728 Pixels)	
Scanning System	Progressive	
Shutter Speed	Auto/Manual, 1/3[4]-1/10000s	
Min. Illumination	0.01 Lux/f1.4 (Color), 0.001 Lux/f1.4 (B&W), 0Lux/f1.4 (IR on)	
S/N Ratio	> 50dB	
Camera Features		
Max IR Length	20m	
Day/Night	Auto (ICR) / Color / B&W	
Backlight Compensation	BLC / HLC / DWDR	
White Balance	Auto/Manual	
Gain Control	Auto/Manual	
Noise Reduction	3D	
Privacy Masking	Up to 4 areas	
Lens		
Focal Length	2.8mm~12mm	
Max Aperture	f1.4	
Focus Control	Auto	
Angle of View	H: 98.1° ~ 29.9°	
Lens Type	Motorized / Auto Iris / Auto Focus	
Video		
Compression	H.264/H.264H/H.264B / MJPEG / TV SYSTEM : PAL/NTSC	
Resolution	3M [2048×1536] / 1080p [1920×1080] / 1.3M [1280×960] / 720p [1280×720] / D1 [704×576] / CIF [352×288]	
Frame Rate	Main Stream	3M [1-20fps] / 1080p [1-25/30fps]
	Sub Stream	D1/CIF [1-25/30fps]
Bit Rate	H.264: 56K ~ 6144Kbps	
Network		
Ethernet	RJ-45	
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, NTP, DHCP, DNS, PPPOE, DDNS, IP Filter	
Compatibility	ONVIF, PSIA, CGI	
Remote Access	iPhone, iPad, Android, PC [ARMS Pro/HD, Internet Browser, X4, Synergy VMS]	
General		
Power Supply	DC12V, PoE [802.3af], < 7.5W power consumption	
Working Environment	-30°C~+60°C, < 95% RH	
Ingress Protection	IP66	
Vandal Resistance	IK10	
Dimensions	122mm diameter × 90mm	
Weight	0.5kg	